




Performance


- 600 CFM Integrated Blower included
- Three fan speeds plus 10 minute high-power operation mode
- Dishwasher safe stainless-frame mesh filters
- Filter systems are highly efficient at capturing grease
- Telescopic chimney - adjustable at installation
- Powerfully quiet ventilation systems
- 6" Round duct size
- Vertical ducting direction
- Hood includes filters, lights, backdraft damper and transition

Design

- Brushed stainless steel finish
- Welded, polished seams for a flawless design
- Easy to operate control buttons
- Halogen lighting spotlights your best recipes

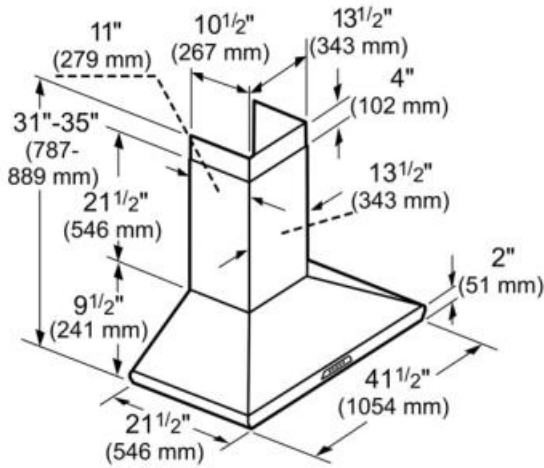

measurements in inches and mm

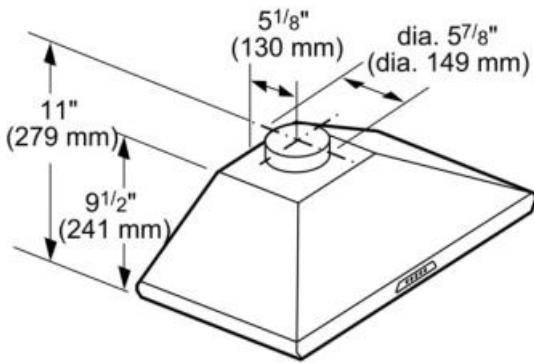

measurements in inches and mm

| | |
|--|-------------------------------|
| Frequency (Hz) | 60 |
| Approval certificates | ETL |
| Plug type | 120V-3 prong |
| Height of the chimney (in) | 21 1/2"-25 1/2" |
| Net weight (lbs) | 57 |
| Gross weight (lbs) | 68 |
| Required distance above range/rangetop/cooktop | 30"/30" |
| Motor location | Integrated motor in hood body |
| Diameter of air duct (in) top | 6 |
| Operating mode | Ducted |
| Optional accessories | CHIMXHMC |
| Number of lights | 3 |
| Type of lamps used | Halogen |
| Total power of the lamps (W) | 60 |
| Grease filter material | Washable aluminium |
| Grease filter type | Multilayer cassette |