




Performance


- Three fan speeds plus 10 minute high-power operation mode
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Delayed shut off tackles lingering odors for up to 10 minutes
- Dimmer lighting - for those hours after a late meal
- Dishwasher safe stainless-frame mesh filters
- Filter systems are highly efficient at capturing grease
- Powerfully quiet ventilation systems
- 8" Round duct size
- Vertical ducting direction
- Blowers sold separately
- Choose from Inline, Remote or Integrated Blowers
- Telescopic chimney - adjustable at installation

Design

- Brushed stainless steel finish
- Welded, polished seams for a flawless design
- Premium electronic touch controls
- Halogen lighting spotlights your best recipes

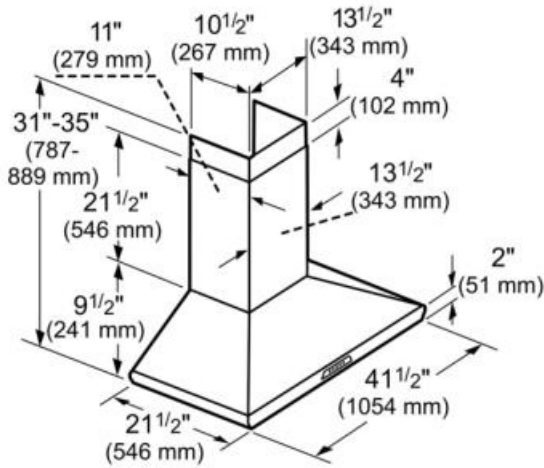

measurements in inches and mm

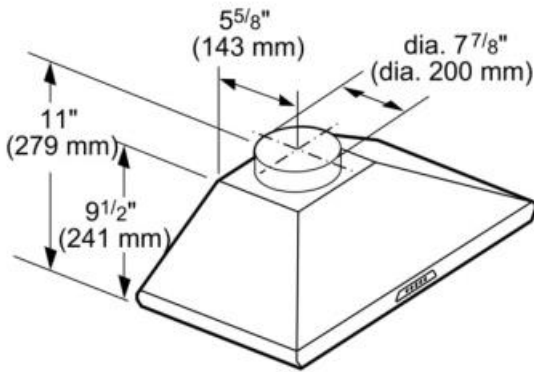

measurements in inches and mm

| | |
|--|-------------------------------|
| Frequency (Hz) | 60 |
| Approval certificates | ETL |
| Plug type | 120V-3 prong |
| Net weight (lbs) | 44 |
| Gross weight (lbs) | 56 |
| Required distance above range/rangetop/cooktop | 30"/30" |
| Motor location | External motor |
| Diameter of air duct (in) top | 8 |
| Operating mode | Ducted |
| Optional accessories | CHIMXHMC, RFPLT1000, RFPLT600 |
| Number of lights | 3 |
| Type of lamps used | Halogen |
| Total power of the lamps (W) | 60 |
| Grease filter material | Washable aluminium |
| Grease filter type | Multilayer cassette |