



INNOVATION

- Exclusive, patented Star® Burner – most even heating, unsurpassed flame coverage
- QuickClean Base™ designed for easy surface cleaning
- Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow® Simmer burners
- Cleans both ovens simultaneously in just 2 hours


PERFORMANCE

- Professional style, continuous cast iron grates
- Continuous porcelain, easy to clean cooking surface
- Widest range of simmer options from 375 BTU to 3,000 BTU
- Every burner 18,000 BTU (NG)
- Star® design delivers superior heat spread for any size pan
- Simmer without stirring/scorching with exclusive ExtraLow®
- Superior griddle results-6 pass, 1630 watt electric griddle
- Titanium surface non-stick, rust-proof cast-aluminum griddle
- Grill accessory-thermostatically controlled for even heating
- Titanium surface non-stick, rust-proof cast-aluminum grill accessory
- Removable griddle and grill accessory for easy clean-up
- Powerful, 8-pass bake and broil elements
- Powerful, 6-pass bake and broil elements in small oven
- Third Element Convection offers precise airflow for cooking on multiple levels without flavor transfer
- Massive oven capacity of 4.4 cu.ft. plus 2.2 cu.ft. in small oven

- Six rack levels for multiple item cooking
- Full Access® telescopic racks, integrated easy-grip handle
- Electronic oven control ensures precise heating
- Large oven door window for maximum viewing
- Powerful halogen lighting illuminates the oven cavity
- Sabbath mode

DESIGN

- Bold Professional design
- Truly Flush Mounted™, 24" standard cabinet depth
- Patented Pedestal Star® Burner with QuickClean Base™
- Restaurant style metal knobs
- Signature blue indicator lighting
- 48" units ship standard with island trim included

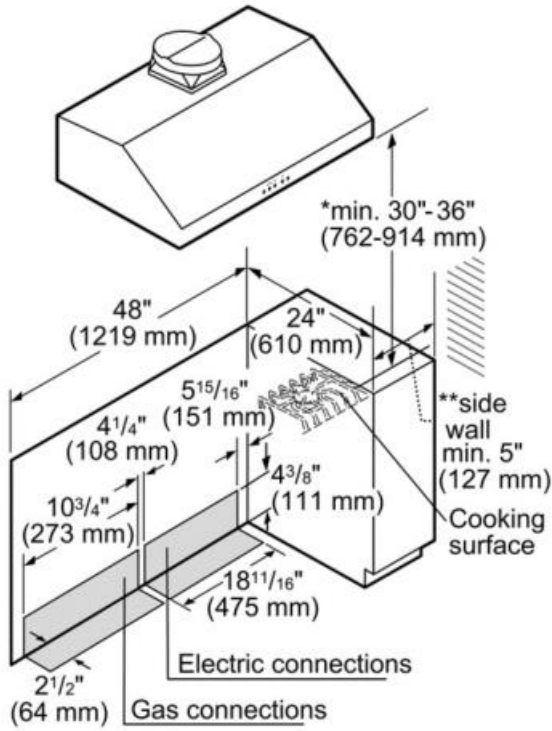


* 30" (762 mm) minimum clearance above cooking surface to non-combustible surface. Minimum clearance above cooking surface to combustible surface is 36" (914 mm).

** 5" (127 mm) minimum clearance from sides of the cooker, above the cooking surface, to combustible side walls.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches

| | |
|----------------------------------|---|
| Amps (A) | 50 |
| Frequency (Hz) | 60 |
| Gas type | Natural gas 15 mbar (USA) |
| Approval certificates | CSA, CUL |
| Plug type | no plug |
| Net weight (lbs) | 505 |
| Gross weight (lbs) | 560 |
| Temperature control | No control of the temperature |
| Time control | No |
| Location of 1st heating element | front left |
| Type of grate | Cast iron |
| Number of double grates | 3 |
| Knob material | Full metal |
| Included accessories | 1 x island trim, 1 x Broiler pan, 1 x broiler pan small |
| Power of griddle element | 1630 |
| Power of 1st burner (BTU) | 18000 |
| Power of 1st heating element (W) | 5.27 |
| Location of 2nd heating element | center left |
| Power of 2nd burner (BTU) | 18000 |
| Location of 3rd heating element | back left |
| Location of 4th heating element | middle back |
| Power of 4th burner (BTU) | 18000 |
| Location of 5th heating element | back right |
| Power of 5th burner (BTU) | 18000 |
| Location of 6th heating element | center left |

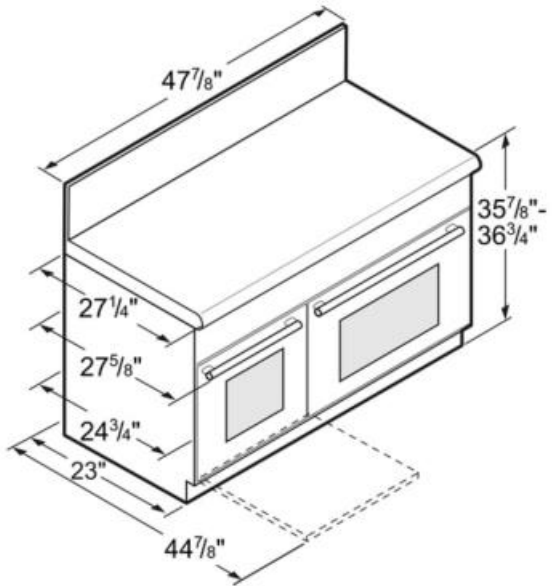

measurement in inches