



INNOVATION

- Exclusive, patented Star® Burner most even heating, unsurpassed flame coverage
- QuickClean Base[™] designed for easy surface cleaning
- Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow® Simmer burners

PERFORMANCE

- Professional style, continuous cast iron grates
- Continuous porcelain, easy to clean cooking surface
- Every burner 15,000 BTU (LP)
- Widest range of simmer options from 375 BTU to 3,000 BTU
- Star® design delivers superior heat spread for any size pan
- Simmer without stirring/scorching with exclusive ExtraLow®
- Superior griddle results-6 pass, 1630 watt electric griddle
- Titanium surface non-stick, rust-proof castaluminum griddle
- Grill accessory-thermostatically controlled for even heating
- Titanium surface non-stick, rust-proof castaluminum grill accessory
- Removable griddle and grill accessory for easy clean-up
- Powerful, 22,000 BTU bake and 19,000 BTU broil burners
- Convection Bake offers precise multi-level baking results
- Massive oven capacity of 4.4 cu.ft. plus 2.2 cu.ft. in small oven
- Six rack levels for multiple item cooking
- Full Access® telescopic racks, integrated easy-grip




handle

- Electronic oven control ensures precise heating
- Large oven door window for maximum viewing
- Powerful halogen lighting illuminates the oven cavity
- Sabbath mode

DESIGN

- Bold Professional design
- Truly Flush Mounted™, 24" standard cabinet depth
- Patented Pedestal Star® Burner with QuickClean Base™
- Restaurant style metal knobs
- Signature blue indicator lighting
- 48" units ship standard with island trim included



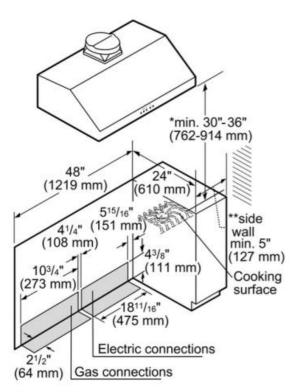


- * 30" (762 mm) minimum clearance above cooking surface to non-combustible surface. Minimum clearance above cooking surface to combustible surface is 36" (914 mm).
- ** 5" (127 mm) minimum clearance from sides of the cooker, above the cooking surface, to combustible side walls.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches

20
60
Liquid gas 27,5 mbar (USA)
CSA
120V-3 prong
509
565
Cast iron
3
Full metal
1 x island trim, 1 x Broiler pan small, 1 x Broiler pan
1630
PA12CHPBLK, PA12GRILHC, PA18GTRH, PA30GTRH, PA48GHSH PA48GLBH, PAGRIDDLE, PAKNOBLK, PAKNOBLU, PC24CHPBLK, PWOKRINGHC
front left
17000
4.98
back left
17000
4.98
back right
17000
4.98
front right
17000





measurement in inches