




### **Design**

- Timeless built-in stainless steel refrigerator
- Masterpiece Handle Design


### **Performance**

- Electronic controls for precise temperature management
- FlexTemp® Drawer optimized for fish, meat and produce
- Crisper Drawers
- Gallon door bins
- Frameless glass shelves
- Height adjustable glass shelves
- All metal freezer baskets
- Filtered ice-maker
- SuperCool - Chills food quickly
- Sabbath mode
- Door open alarm
- NO\_FEATURE Cu. Ft.

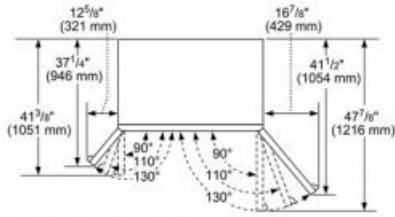


The location must permit both doors to open to a minimum of 90°. Allow 4 1/2" (114 mm) minimum space between the side of the refrigerator and a corner wall.


Top Grille Clearance

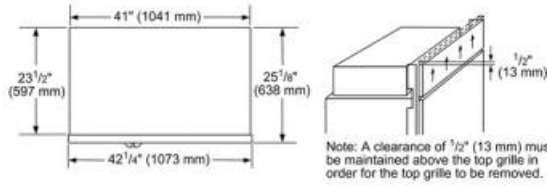

Note: A clearance of 1/2" (13 mm) must be maintained above the top grille in order for the top grille to be removed.



Width dimensions are measured from trim edge to trim edge.  
 Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.  
 \* When leveling legs are fully extended to 1 1/4" (32 mm) below rollers, add 1 1/8" (29 mm) to the height dimensions.



The water line attached to the back of the refrigerator is 5 ft (1524 mm) long. Height dimensions are shown with leveling legs extended 1/8" (3 mm) below rollers.  
 \* When leveling legs are fully extended to 1 1/4" (32 mm) below rollers, add 1 1/8" (29 mm) to the height dimensions.  
 The depth from the front of the top grille to the back of the refrigerator cabinet is 25 1/8" (638 mm).

Frequency (Hz)	60
Approval certificates	CSA, UL
Energy consumption (kWh/yr)	772.0
Net weight (lbs)	541
Gross weight (lbs)	600
Refrigerator gross capacity (cu.ft.)	16
Freezer gross capacity (cu.ft.)	9
Number of door bins - freezer	6
Number of shelves - freezer	3
Water filter replacement indicator	Yes
Reversible door hinge	No