





Design



- Timeless built-in stainless steel refrigerator
- Masterpiece Handle Design

Performance


- Full-Filtered External Water and Ice Dispenser
- On the door ice bin saves freezer space
- Electronic controls for precise temperature management
- FlexTemp® Drawer optimized for fish, meat and produce
- Crisper Drawers
- Gallon door bins
- Frameless glass shelves
- Height adjustable glass shelves
- All metal freezer baskets
- Filtered ice-maker
- SuperCool - Chills food quickly
- Sabbath mode
- Door open alarm
- NO_FEATURE Cu. Ft.

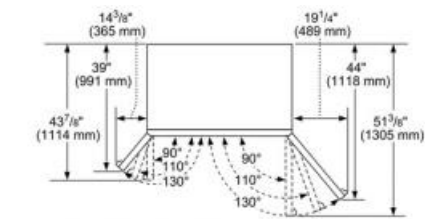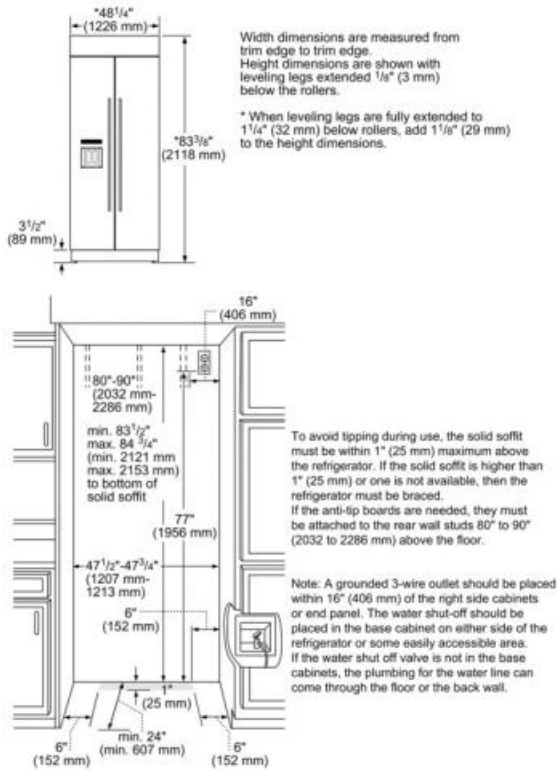

The location must permit both doors to open to a minimum of 90°. Allow 4 1/2" (114 mm) minimum space between the side of the refrigerator and a corner wall.

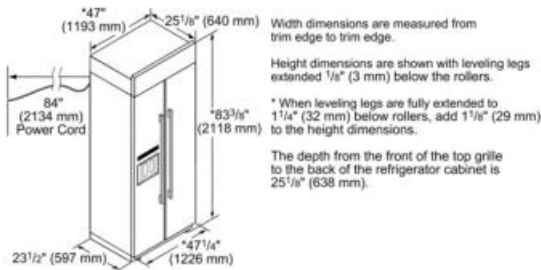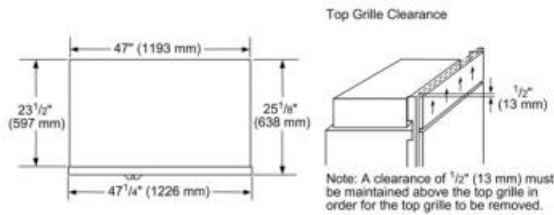

Frequency (Hz)	60
Approval certificates	CSA, UL
Energy consumption (kWh/yr)	884.8
Net weight (lbs)	589
Gross weight (lbs)	653
Refrigerator gross capacity (cu.ft.)	19
Freezer gross capacity (cu.ft.)	11
Number of door bins - freezer	6
Number of shelves - freezer	4
Water filter replacement indicator	Yes
Reversible door hinge	No



The water line attached to the back of the refrigerator is 5 ft (1524 mm) long. Height dimensions are shown with leveling legs extended $\frac{1}{8}$ " (3 mm) below rollers.

* When leveling legs are fully extended to $1\frac{1}{4}$ " (32 mm) below rollers, add $1\frac{1}{8}$ " (29 mm) to the height dimensions.

The depth from the front of the top grille to the back of the refrigerator cabinet is $25\frac{1}{8}$ " (638 mm).