




Performance


- Suitable for wall or island applications
- Downdraft rises over 13" to capture steam from the tallest pots
- Downdraft recirculation possible with module RECIRC36DF
- Three fan speeds
- Dishwasher safe full-face filters also act as a splatter shield
- Filter systems are highly efficient at capturing grease
- Powerfully quiet ventilation systems
- Blowers sold separately
- Choose from Inline, Remote or Integrated Blowers
- Replacement charcoal filters available (CHFILT3036)

Design


- Brushed stainless steel finish
- Easy to operate control buttons

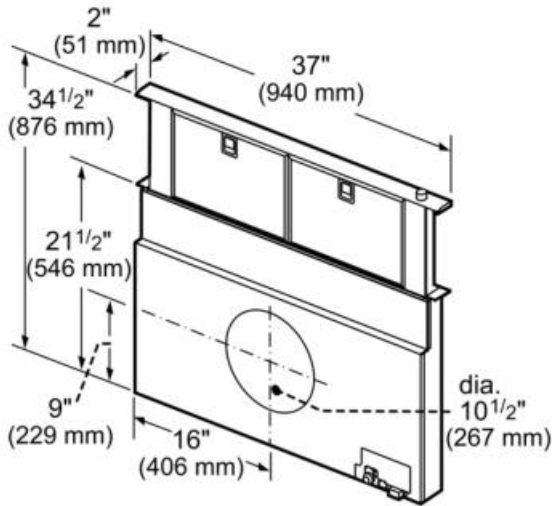

measurements in inches and mm

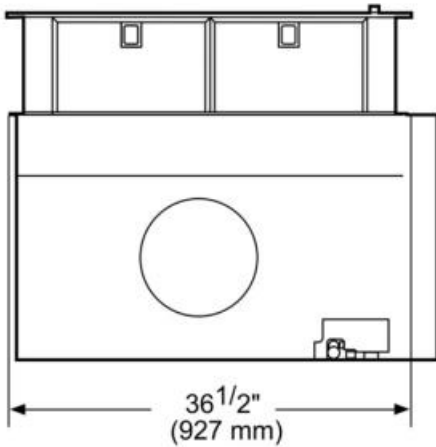

measurements in inches and mm

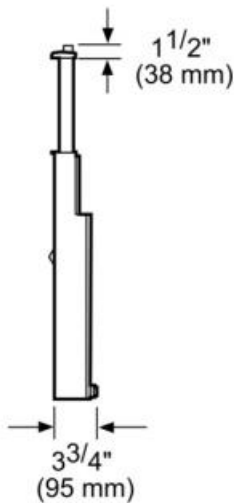

measurements in inches and mm

| | |
|--------------------------------|---|
| Amps (A) | 10 |
| Frequency (Hz) | 60 |
| Approval certificates | CSA, UL |
| Plug type | 120V-3 prong |
| Vertical rise height (in) | 13" |
| Net weight (lbs) | 42 |
| Gross weight (lbs) | 47 |
| Motor location | External motor |
| Diameter of air duct (in) back | 10 |
| Operating mode | Convertible: Ducted / Recirculating |
| Required accessories | Blower |
| Optional accessories | EXTNCB25, RECIRC36DF, RFPLT1000, RFPLT600 |
| Grease filter material | Washable aluminium |
| Grease filter type | Multilayer cassette |